

Unsaturated Shear Strength Characteristics of Filtered Tailings through Modified Direct Simple Shear (MDSS) Apparatus

Udeshika Dilani Thenuwara, Les Dawes, Chaminda Gallage

School of Civil and Environmental Engineering, Faculty of Engineering, Queensland University of Technology, Brisbane, Australia, udeshika.acharige@hdr.qut.edu.au

Dareeju Biyanvilage

Geotechnical Engineering Department, Knight Piésold Pty. Ltd., Brisbane, Australia

ABSTRACT: Filtered Tailings Storage Facilities (FTSFs) are increasingly recognised as a sustainable alternative to conventional slurry tailings storage facilities within the mining industry, owing to their enhanced stability and environmental benefits. However, the geotechnical design of FTSFs presents unique challenges due to the unsaturated state of filtered tailings as their design is hampered by a fundamental gap in understanding unsaturated shear strength, as empirical models fail to capture the unique response of tailings. A significant knowledge gap exists in applying Critical State Soil Mechanics (CSSM) principles, which are mature for saturated soils, to unsaturated materials such as tailings. Consequently, this study attempted to evaluate the critical state behaviour of filtered tailings. This study investigates the unsaturated shear strength tailings with a dry density of 1.9g/cm³ under a low suction level (30 kPa) and saturated conditions. The tests were conducted using a Modified Direct Simple Shear (MDSS) apparatus, specifically designed to incorporate a throughout the test-suction control feature, to circumvent the sophisticated and time-consuming triaxial testing program. The study demonstrates that higher density (1.9g/cm³) and matric suction (30kPa) significantly enhance tailings' shear strength. Critically, comparison of the results from the study with literature indicate that a unique critical state line (CSL) does not exist for this material; instead, a family of parallel CSLs can be observed, governed by the initial particle size distribution and compaction fabric, demonstrating transitional behaviour where the end-state retains a memory of the initial structure. A key limitation of this research is the focus on a single density and suction level; the metastable nature of suction-derived strength underscores that hydraulic management is paramount for long-term stability. Future research must expand testing to a wider range of suctions and densities to develop predictive models that integrate the effects of suction and fabric, enabling reliable design standards for FTSFs.

KEYWORDS: Filtered tailings, Unsaturated shear strength, Direct simple shear, Unsaturated soil, Critical state line

1 INTRODUCTION

One of the most pressing challenges in modern mining operations is the safe and sustainable management of tailings. Conventional slurry disposal methods pose significant environmental and safety risks, as evidenced by catastrophic failures worldwide (Wilson, 2021). In response, filtered tailings have emerged as a promising alternative in most cases, aligning with the best available technique principles by reducing water content and promoting unsaturated conditions. This approach enhances tailings stability through dilatant behaviour, minimising the risk of liquefaction and failure (Oldecop & Rodari, 2021). Despite these advantages, the widespread adoption of filtered tailings faces a critical obstacle: a lack of fundamental understanding of their unsaturated shear behaviour. Current design practices rely heavily on empirical models developed for natural soils, which often fail to capture the unique geo-mechanical response of tailings under varying suction and density conditions (Wilson, 2021). This knowledge gap complicates the stability assessment of Tailings Storage Facilities (TSFs), underscoring the need for targeted research to develop reliable predictive frameworks.

Despite decades of research, fundamental disagreements persist regarding how the net stress friction angle ($\tan\phi^a$) varies with matric suction in unsaturated soils. While foundational models (Alonso et al., 1990; Fredlund et al., 1978; Oberg & Sallfors, 1997) assume $\tan\phi^a$ equals the saturated friction angle ($\tan\phi^s$) and treating the suction-related parameter $\tan\phi^b$ as constant, experimental evidence reveals more complex behaviour. Studies by Gan et al. (1988) and Vanapalli et al. (1996) demonstrate that $\tan\phi^b$ decreases with increasing suction, prompting revised theoretical frameworks. More sophisticated approaches (Gallipoli et al., 2008; Toll & Ong, 2003) explain these variations through soil fabric dynamics - where moderate suction strengthens aggregates (increasing $\tan\phi^a$), but excessive suction causes aggregate breakdown and strength reduction. This reveals a critical limitation of conventional models: their inability

to capture the nonlinear, microstructure-dependent nature of unsaturated shear strength.

The unique behaviour of tailings further complicates unsaturated strength prediction. Although the modified Mohr-Coulomb framework (Fredlund, 2006; Fredlund et al., 2012) provides a theoretical basis, empirical validations show alarming inconsistencies. Garven and Vanapalli (2006) found most of the models perform poorly for tailings, with even the best by Vanapalli et al. (1996) achieving only 70% accuracy. Gold tailings studies by Rassam and Williams (1999a, 1999b) reveal particularly complex behaviour: strength increases linearly with suction up to the air-entry value, then transitions to nonlinear plateaus near residual saturation. These findings underscore a critical research gap - current models fail to universally predict tailings behaviour because they don't adequately account for material-specific responses to suction changes. This limitation poses significant challenges for designing filtered tailings facilities, where precise strength estimation is crucial for stability.

The extension of critical state soil mechanics (CSSM) to unsaturated conditions remains a contentious topic, with researchers divided over fundamental aspects of soil behaviour under suction. While some studies (Bolton, 1986; Wheeler & Sivakumar, 1995) argue for a unique critical state line (CSL) in the mean effective stress-deviatoric stress plane (p' - q), others (Cai et al., 2022; Sivakumar et al., 2010) report non-parallel CSLs in the $\ln p'$ -specific volume plane, suggesting that suction alters the soil's intrinsic compression behaviour. This discrepancy raises critical questions: Does suction merely shift the CSL, or does it fundamentally change the soil's critical state response? Proponents of the unique CSL hypothesis contend that suction acts as an independent stress variable, preserving the CSSM framework's simplicity (Alonso et al., 1990). However, critics highlight that fabric changes and partial saturation disrupt particle interactions, leading to suction-dependent critical states—a phenomenon particularly evident in high-plasticity clays

(Estabragh & Javadi, 2008). The lack of consensus undermines the reliability of predictive models for slope stability and earth structures, where accurate strength estimation is paramount.

Further debate centres on material-specific responses, particularly in transitional soils like silty sands. Research by Rampino et al. (2000) and Cai et al. (2022) demonstrates that low-density silty sands exhibit shear shrinkage, whereas dense specimens dilate, implying that density and suction jointly govern critical-state behaviour. Yet, the validity of a unified M^* parameter* (e.g., $M^*=1.4$ for silty sand) across suction levels remains contested. If suction-induced particle aggregation (Toll, 1990) enhances dilatancy, should M^* be suction-dependent? Opposing views emerge from studies on kaolin (Sivakumar et al., 2010), where non-parallel CSLs suggest that M^* varies with hydration. This inconsistency challenges the universality of CSSM for unsaturated soils and calls for a microstructure-informed approach. Until these uncertainties are clarified, practitioners must critically evaluate whether existing critical-state frameworks can adequately address practical unsaturated soil challenges, or whether fundamentally new theoretical approaches may be required.

The critical gaps in understanding the unsaturated shear strength characteristics of tailings underscore the urgent need for more experimental research to advance both theoretical frameworks and practical applications. While filtered tailings present a promising solution for sustainable mine waste management, the current inability of empirical models to reliably predict their mechanical behaviour under varying suction and density conditions poses significant challenges for TSF design and stability assessment. Therefore, this study employs Direct Simple Shear (DSS) testing as a pragmatic and efficient methodology to evaluate unsaturated tailings behaviour compared to the triaxial testing with its sophisticated setup and time-consuming procedures, which often limit its practicality for extensive parametric studies.

2 TEST MATERIAL AND BASIC SOIL PROPERTIES

Gold mine tailings procured from a gold ore mining site in Australia are used in this study. The tailings from the same mine site have previously been the subject of investigation in related research by Nayanthara et al. (2024); Nayanthara et al. (2023); Pahalage (2024) and Pahalage Nishadi et al. (2024). The Particle Size Distributions (PSDs) of the gold tailings obtained by previous studies and from this study are shown in Figure 1, which indicates a clear difference among the PSDs. Table 1 compares the previously reported basic index properties of gold tailings with those obtained in the present study, highlighting several key differences. Fine content decreased from 67.2% and 64.0% in

earlier studies to 56.3% in this study, and the mean particle size (D_{50}) increased substantially from $25\mu\text{m}$ and $40\mu\text{m}$ to $65\mu\text{m}$, suggesting that the current sample is considerably coarser, likely due to differences in ore mineralogy. All the gold tailings exhibit a low plasticity index value, classifying them as a low-plasticity material. According to the Unified Soil Classification System (USCS), these tailings can be identified as Silty Clay (CL-ML).

3 MODIFIED DIRECT SIMPLE SHEAR TETSER AND PROCEDURE

The Conventional Direct Simple Shear test setup has been improved to control the matric suction using direct application of negative pore water pressure to the sample by means of vacuum. The porous disk in the base pedestal was replaced to embed a 100kPa air entry value (AEV) ceramic disc (Figure 2) to perform shear tests on the sample under direct matric suction up to 80 kPa.

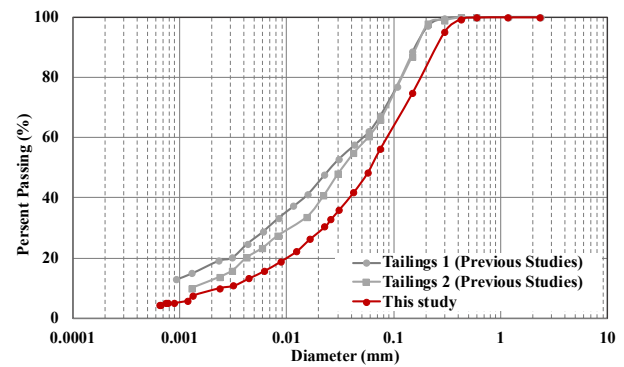


Figure 1. Particle size distribution of the gold tailings

Table 1. Basic index properties of the gold tailings

Property	Previous Studies		This Study [#]
	Tailings 1 ⁺	Tailings 2 [*]	
Liquid Limit	26.6%	24.0%	25.6%
Plastic Limit	19.4%	18.0%	17.7%
Plasticity Index	7.2%	6.0%	7.2%
Fines Content (<75 μm)	67.2%	64.0%	56.3%
Mean particle size (D_{50})	25 μm	40 μm	65 μm
Specific Gravity (GS)	2.78	2.76	2.72
OMC (Standard Proctor)	-	-	14.5%
MDD (Standard Proctor)	-	-	1.87g/cm ³

⁺ Tailings 1 by Nayanthara et al. (2024 & 2023) & Pahalage (2024)

^{*} Tailings 2 by Pahalage Nishadi et al. (2024) & Pahalage (2024)

[#] Basic index properties were obtained in accordance with the Australian Standards

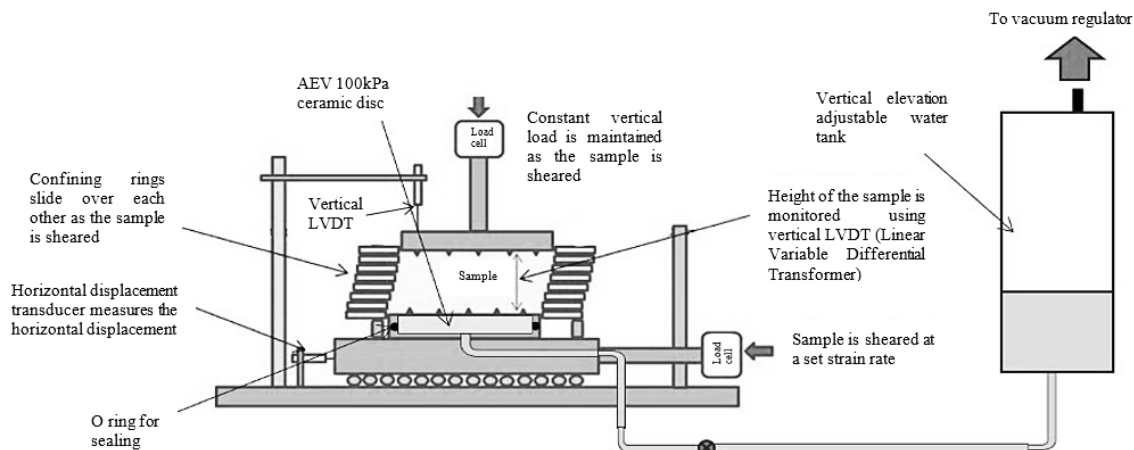


Figure 2. Schematic diagram of the Modified Direct Simple Shear Test setup.

Table 2. Summary of experimental results of the MDSS tests (Constant Load tests only)

Test No.	Initial Conditions			Consolidation Stage	Peak (UF)	Critical State (CS)				
	γ_d (g/cm ³)	S (kPa)	e_i			e_{pc}	σ'_{v0} (kPa)	τ_{peak} (kPa)	σ'_{vCS} (kPa)	p'_{CS} (kPa)
This Study	MDSS (1.9)_S0_σv50	1.88		0.474	0.281	44.8	31.5	46.3	30.9	0.263
	MDSS (1.9)_S0_σv100	1.86	0	0.482	0.274	101.0	70.4	106.2	70.8	0.269
	MDSS (1.9)_S0_σv200	1.88		0.482	0.267	192.1	98.9	211.1	140.7	0.193
	MDSS (1.9)_S30_σv50	1.89		0.466	0.399	50.0	41.0	49.9	33.3	0.377
	MDSS (1.9)_S30_σv100	1.81	30	0.531	0.347	104.5	77.3	95.8	63.8	0.318
	MDSS (1.9)_S30_σv200	1.91		0.451	0.318	210.1	139.7	211.5	141.0	0.278
Pahalage (2024)	DSS (1.3)_S0_σv50	1.37		1.03	0.656	50.0	15.8	49.0	32.6	0.609
	DSS (1.3)_S0_σv100	1.31	0	1.12	0.630	100.0	30.5	106.3	70.8	0.407
	DSS (1.3)_S0_σv200	1.31		1.11	0.985	199.9	58.3	208.0	138.7	0.401

The Modified Direct Simple Shear (MDSS) apparatus was used to test tailings under controlled suction. Specimens were prepared by placing a latex membrane-lined sample between filter papers within a steel ring stack to maintain a constant cross-section. After applying a 10N seating load, specimens were saturated. The negative pore water pressure was then applied to achieve the desired suction by adjusting the vacuum in the water tank, maintaining system airtightness for more than 27 hours to reach equilibrium. This step was omitted for saturated (0 kPa suction) test series, where consolidation began immediately after saturation. The consolidation stage proceeded under target normal stress until primary consolidation was complete, indicated by stabilised vertical displacement. Shear testing employed a controlled displacement rate of 0.0002 mm/s, selected based on the findings of Gan et al. (1988) which established that rates ≤ 0.00022 mm/s are necessary to maintain pore-air pressure equilibrium in clayey soils (Gallage & Uchimura, 2016). This low strain rate prevents the development of non-uniform suction conditions that may arise from particle rearrangement and shear band formation during testing. During shearing, constant normal stress was maintained to allow volume changes only through specimen height adjustment, facilitated by the steel rings. Horizontal and vertical loads and displacements were recorded throughout the test. Post-shearing, the specimen's final moisture content was determined.

4 RESULTS AND DISCUSSION

4.1 Experimental Results

This study examined the shear behaviour of tailings specimens with a dry density of 1.9 g/cm³ under various stress conditions using the Modified Direct Simple Shear System. The testing program included both saturated (S0) and unsaturated (S30, with 30 kPa matric suction) conditions, conducted under constant vertical loads representing three axial stress levels: 50 kPa, 100 kPa, and 200 kPa. Figure 3 presents the shear stress versus shear strain relationships for specimens under both S0 and S30 conditions. Shear strain was calculated as the ratio of lateral displacement to the specimen height at the end of the consolidation stage. Identified 'Ultimate Failure' points and 'Critical State' points for each test are represented with a rectangle and circle, denoted as UF and CS in the legend of the Figure 3 and 4, respectively. Key experimental observations, including initial dry density (γ_d), applied suction (S), initial and post-consolidation void ratios (e_i and e_{pc}), normal/axial stress at the end of consolidation (σ'_{v0}), peak shear strength (τ_{peak}),

normal/axial stress at the critical state (σ'_{vCS}), mean effective normal/axial stress at the critical state (p'_{CS}) and void ratio at the critical state (e_{CS}), are summarized in Table 2, and will be discussed in Section 4.2 and 4.3. Figure 4 illustrates the variation of volumetric strain (equivalent to axial strain in this test series) with shear strain for the 1.9 g/cm³ specimen. Despite being compacted to maximum dry density according to the standard proctor compaction test, the specimens exhibited contractive volumetric strain behaviour under these testing conditions.

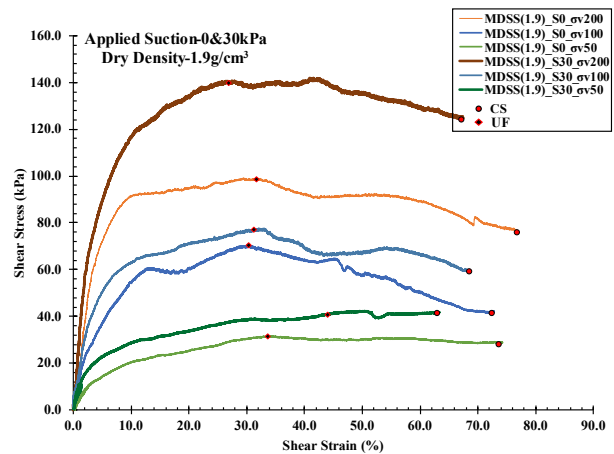


Figure 3. Shear stress variation over shear strain of specimens of dry density 1.9g/cm³ when saturated and under constant suction of 30kPa

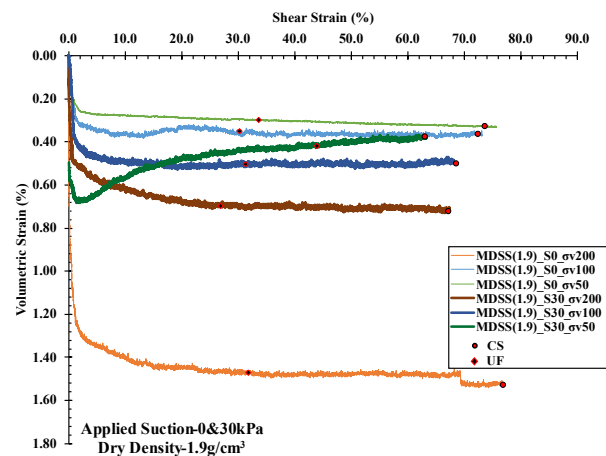


Figure 4. Volumetric strain variation over shear strain of specimens of dry density 1.9g/cm³ when saturated and under constant suction of 30kPa

4.2 Peak shear strength and Ultimate Failure (UF) envelope

Figure 5 illustrates the relationship between peak shear strength and applied axial stress (50, 100, and 200 kPa) for tailings specimens compacted to an initial dry density of 1.9 g/cm³ under both saturated (S0) and unsaturated (S30) conditions in this study. For comparative density analysis, experimental data from Pahalage (2024) were included, where specimens prepared via the slurry deposition method (initial density = 1.3 g/cm³) were examined under similar loading conditions. The derived geotechnical parameters, including the axial stress-dependent friction angle (ϕ^a) and apparent cohesion, are systematically presented in Table 3.

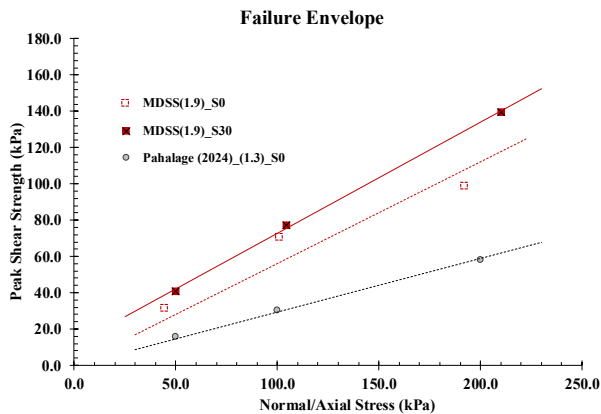


Figure 5. Comparison of peak shear strength of tailings specimens for S0 & S30 under axial stresses of 50 kPa, 100 kPa, and 200 kPa

Table 3. Summarised friction angle to the normal/axial stress and the apparent cohesion of the 1.9 g/cm³ & 1.3-1.4g/cm³ dense tailings specimens

	Controlled Suction (kPa)	Friction angle ϕ^a (°)	Apparent Cohesion (kPa)	R2
This Study (1.9g/cm ³)	0	28.5	0	0.980
	30	31.5	11.47	0.999
Pahalage (2024) (1.3-1.4g/cm ³)	0	16.45	0	0.999

Analysis of the experimental results reveals that specimens compacted to a higher density (1.9 g/cm³) exhibit superior peak shear strength characteristics. Notably, these specimens demonstrate a significant enhancement in shear resistance when subjected to increased matric suction (S30 condition), highlighting the combined influence of density and unsaturated conditions on mechanical behaviour. Dense specimens exhibit higher friction angles than loose samples due to enhanced particle interlocking and dilatancy during shearing (Bolton, 1986; Yang & Luo, 2015). The tighter packing in dense soils forces particles to override each other, requiring greater energy expenditure that manifests as increased shear resistance. This mechanical interlocking is complemented by pronounced dilatancy, where upward particle movement generates additional normal stresses at contacts, effectively amplifying the mobilised friction angle (Been & Jefferies, 1985). Furthermore, dense specimens develop more uniform force chains and stable particle orientations during shear, delaying the formation of failure planes and maintaining higher shear resistance until larger strains are reached (Guo & Su, 2007). These particle-scale mechanisms collectively explain why compacted tailings with lower void ratios demonstrate superior shear strength characteristics compared to looser deposits.

Though there is limited data to compare, the determined apparent cohesion values were again compared with the matric suction levels, as shown in Figure 6. It was found that the friction angle with respect to matric suction (ϕ^b) has a value of 20.9

degrees. The models proposed by many researchers (Alonso et al., 1990; Fredlund et al., 1978; Oberg & Sallfors, 1997), consider $\tan\phi^b$, the friction angle related to matric suction, as a constant independent of other factors. This simplification aids in modelling but has been challenged by experimental data. However, experimental results from researchers like Gan et al. (1988) and Vanapalli et al. (1996) indicate that $\tan\phi^b$ decreases with increasing suction, contradicting the assumption of its constancy. Further testings are expected to be conducted in future to investigate these points under this study.

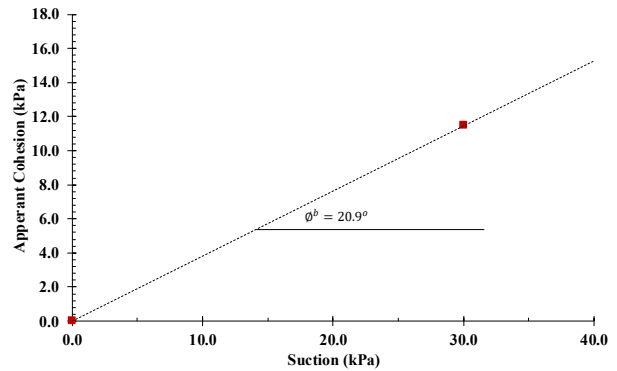


Figure 6. Apparent cohesion with S0 and S30 suction levels for 1.9g/cm³ dense specimen.

4.3 Critical State Line (CSL)

Critical state conditions from Table 2 were graphically interpreted in Figure 7. Two different equations (equations 1 and 2) could be distinguished for S0 and S30 conditions of the 1.9 g/cm³ specimen. Equation 3 was developed for the gold tailings (tailings 2), by Pahalage Nishadi et al. (2024), using the tailings specimen prepared by the moist tamped and slurry deposited methods. Dry density of those specimens varied between 1.3-1.45g/cm³, representing a relatively very loose state of tailings compared to the specimen used in this study.

From Figure 7, it is evident that, at a constant dry density, the CSLs in the σ'_v -e plane remain parallel across different matric suctions; however, they shift leftward as suction increases. The parallel shift of CSLs under varying matric suctions at constant dry density has been robustly verified through multiple experimental studies. Alonso et al. (1990) first demonstrated this phenomenon via suction-controlled triaxial tests on kaolin and sandy clay, showing that while suction systematically translated the CSL in the $\ln(p)$ -v plane, the slope (M) remained unchanged, as evidenced by identical critical state stress ratios across suction levels (shown in their Figures 5 & 12). Wheeler and Sivakumar (1995) reinforced these findings through tests on Speswhite kaolin, revealing that suction-modified hardening laws shifted the CSL intercept ($\Gamma(s)$) while preserving its slope (λ), with all paths converging to a geometrically similar critical state hyper line (defined by the Equations 14 & 15 in their paper). Cai et al. (2022) further validated this behaviour for silty sand, confirming that CSLs under 30–200 kPa suction maintained parallel alignment at fixed density, with consistent M^* values in the p^* -q plane (Conclusion d of their paper). Collectively, these studies confirm that suction-induced stiffening alters the CSL's position via pre-consolidation pressure effects, but not its intrinsic slope, governed by particle arrangement. Regardless of the testing method employed, whether suction-controlled triaxial testing or suction-controlled direct simple shear testing, a parallel shift of the CSL can be observed. This methodological independence confirms that the phenomenon is inherent to unsaturated soil behaviour rather than an artifact of specific testing conditions. However, further tests are required for a quantitative comparison.

The parallel translation of the critical state line (CSL) with matric suction enhances shear strength and apparent pre-consolidation, offering potential for steeper, higher-density tailings storage. This strength gain is, however, metastable. It is contingent on maintaining the unsaturated hydraulic regime, as rapid saturation can cause CSL regression, leading to collapse, strength loss, and potential static liquefaction. Therefore, capitalizing on this behaviour necessitates a design paradigm focused on the rigorous, long-term management of hydraulic boundary conditions through controlled drainage and infiltration barriers to prevent catastrophic suction loss.

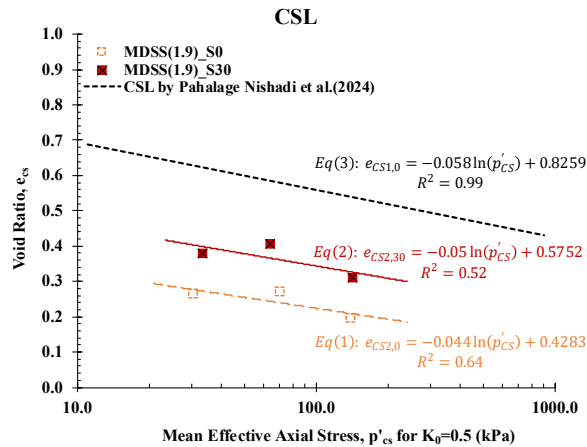


Figure 7. CSLs for gold tailings

The critical state in soils is reached after prolonged shearing and represents a terminal condition characterized by invariant shear strength and void ratio under constant-volume deformation. This ultimate state is path-independent: soil with an initial void ratio lower than the critical value dilates toward it, while soil with a higher initial void ratio contract (Jefferies & Been, 2015). Thus, irrespective of starting density or stress history, continued shear deformation converges toward this unique mechanical equilibrium. However, experimental evidence from this study challenges the assumption of a unique CSL for the tailings. As demonstrated in Figure 7, tailings samples with differing initial densities exhibit distinct CSLs. This divergence is fundamentally linked to variations in PSD, as seen in Figure 1, where Tailings 2 and the primary study material possess different gradations. Muir Wood and Maeda (2008) established that particle crushing and evolving gradation directly influence the CSL, noting that while crushing itself does not immediately alter void ratio, it modifies constitutive properties, leading to more efficient particle packing and a subsequent reduction in the critical void ratio. Contrary to a simplistic expectation that higher fines content linearly depresses the CSL, the relationship is non-monotonic. As shown by Lines and Llano-Serna (2025), CSL intercepts for soil mixtures with 5%, 40%, 50%, and 80% fines initially decreased up to 40% fines before rising at higher fines contents. This pattern suggests that extreme gradations: either too fine or too coarse tailings can result in looser, less stable packings at the critical state, whereas well-graded tailings with moderate fines achieve lower critical void ratios.

This variability is not anomalous but systematic. Research by Rodrigues et al. (2025) and Li and Coop (2019) confirms significant CSL variations even within a single TSF, primarily driven by heterogeneity in grain size composition. Rodrigues et al. (2025) further identify sand content, rather than the dominant silt fraction, as a key determinant of geo-mechanical behaviour. Complementing this, Velten et al. (2022) demonstrate that CSLs in the $\ln(p)$ - v plane are not unique but depend intrinsically on the initial compaction fabric. For an identical initial density, distinct

PSDs yield location-specific CSLs, underscoring that grading, mineralogy, and particle shape are co-dominant factors (Li et al., 2018). The studied tailings exhibited "transitional behaviour," wherein end-of-shear states failed to converge to a singular CSL, instead retaining a dependence on the initial void ratio. This indicates the existence of a robust fabric that preserves the memory of the initial state through different compaction densities.

These findings do not invalidate CSSM but necessitate a refinement of its constitutive frameworks by incorporating a family of parallel CSLs, each specific to a distinct initial fabric and PSD, rather than assuming a single line. It is conclusively established that tailings sourced from the same deposit can possess substantially different geo-mechanical signatures due to compositional variability and variation in beneficiation process and other factors. This mandates a rigorous practice of regular monitoring of grain size distribution and initial compaction conditions. This adjustment is paramount for the reliable design of engineered structures like compacted dry-stack tailings dams, where spatial and temporal variations in material composition are inherent.

5 CONCLUSIONS

This study investigated the shear behaviour of tailings with a dry density of 1.9 g/cm³ under saturated (S0) and unsaturated (S30) conditions using a modified direct simple shear system equipped with a 100 kPa AEV ceramic disc for suction control via a direct negative pore water pressure application using vacuum. Testing under 50 kPa, 100 kPa, and 200 kPa vertical stresses revealed that:

- The MDSS setup used to conduct suction-controlled shearing tests successfully captures the suction effects.
- Both density and matric suction significantly influence the mechanical behaviour of tailings. Specimens compacted to a higher density (1.9 g/cm³) exhibited superior peak shear strength compared to looser specimens (1.3-1.4g/cm³). The application of matric suction (S30) further increased shear resistance, highlighting the combined role of density and unsaturated conditions in governing soil strength.
- For the studied tailings, a unique CSL is not observed. Instead, two parallel CSLs exists, governed systematically by the initial PSD and compaction fabric. The end-state retains a memory of the initial structure, demonstrating transitional behaviour.

The strength derived from unsaturated conditions is metastable. Reliable engineering design, particularly for steepened dry-stack facilities, necessitates a fundamental paradigm shift towards the rigorous management of hydraulic boundary conditions to prevent strength loss and instability upon saturation. While the qualitative phenomenon of parallel CSL shift is well-established, further testing is required for quantitative comparison and the development of predictive models that account for the combined effects of suction, PSD, and initial fabric.

6 ACKNOWLEDGEMENTS

The authors gratefully acknowledge the Queensland University of Technology for providing financial support through a scholarship for the PhD candidature of the lead author. The generous in-kind support provided by Knight Piésold Pty. Ltd., which was instrumental to the practical implementation of this study, is also sincerely appreciated. The authors further acknowledge the continued assistance of the Design and Fabrication Facility (DeFab) at Queensland University of

Technology, Gardens Point Campus, particularly for their support in modifying the experimental apparatus.

7 REFERENCES

- Alonso, E. E., Gens, A., & Josa, A. (1990). A constitutive model for partially saturated soils. *Geotechnique*, 40(3), 405-430. <https://doi.org/10.1680/geot.1990.40.3.405>
- Been, K., & Jefferies, M. G. (1985). A state parameter for sands. *Geotechnique*, 35(2), 99-112. <https://doi.org/10.1680/geot.1985.35.2.99>
- Bolton, M. D. (1986). The strength and dilatancy of sands. *Geotechnique*, 36(1), 65-78. <https://doi.org/10.1680/GEOT.1986.36.1.65> (Thomas Telford Ltd)
- Cai, G., Han, B., Asreazad, S., Liu, C., Zhou, A., Li, J., & Zhao, C. (2022). Experimental study on critical state behavior of unsaturated silty sand under constant matric suctions. <https://doi.org/10.1680/jgeot.21.00264> (*Geotechnique*)
- Estabragh, A. R., & Javadi, A. A. (2008). Critical state for overconsolidated unsaturated silty soil. *Canadian geotechnical journal*, 45(3), 408-420. <https://doi.org/10.1139/t07-105>
- Fredlund, D. G. (2006). Unsaturated soil mechanics in engineering practice. *Journal of Geotechnical and Geoenvironmental Engineering*, 132(3), 286-321. [https://doi.org/10.1061/\(ASCE\)1090-0241\(2006\)132:3\(286\)](https://doi.org/10.1061/(ASCE)1090-0241(2006)132:3(286))
- Fredlund, D. G., Morgenstern, N. R., & Widger, R. A. (1978). SHEAR STRENGTH OF UNSATURATED SOILS. *Canadian geotechnical journal*, 15(3), 313-321. <https://doi.org/10.1139/t78-029>
- Fredlund, D. G., Rahardjo, H., & Fredlund, M. D. (2012). *Unsaturated Soil Mechanics in Engineering Practice*. John Wiley and Sons. <https://doi.org/10.1002/9781118280492>
- Gallage, C., & Uchimura, T. (2016). Direct shear testing on unsaturated silty soils to investigate the effects of drying and wetting on shear strength parameters at low suction. *Journal of Geotechnical and Geoenvironmental Engineering*, 142(3). [https://doi.org/10.1061/\(ASCE\)GT.1943-5606.0001416](https://doi.org/10.1061/(ASCE)GT.1943-5606.0001416)
- Gallipoli, D., Gens, A., Chen, G., & D'Onza, F. (2008). Modelling unsaturated soil behaviour during normal consolidation and at critical state. *Computers and Geotechnics*, 35(6), 825-834. <https://doi.org/https://doi.org/10.1016/j.compgeo.2008.08.006>
- Gan, J. K. M., Fredlund, D. G., & Rahardjo, H. (1988). DETERMINATION OF THE SHEAR STRENGTH PARAMETERS OF AN UNSATURATED SOIL USING THE DIRECT SHEAR TEST. *Canadian geotechnical journal*, 25(3), 500-510.
- Garven, E. A., & Vanapalli, S. K. (2006). Evaluation of empirical procedures for predicting the shear strength of unsaturated soils. *Geotechnical Special Publication 4th International Conference on Unsaturated Soils*, April 2, 2006 - April 5, 2006, Carefree, AZ, United states.
- Guo, P., & Su, X. (2007). Shear strength, interparticle locking, and dilatancy of granular materials. *Canadian geotechnical journal*, 44(5), 579-591. <https://doi.org/10.1139/t07-010>
- Jefferies, M., & Been, K. (2015). *Soil Liquefaction A Critical State Approach, Second Edition*. CRC Press. <https://doi.org/https://doi.org/10.1201/b19114>
- Li, W., & Coop, M. R. (2019). Mechanical behaviour of Panzhihua iron tailings. *Canadian geotechnical journal*, 56(3), 420-435. <https://doi.org/10.1139/cgj-2018-0032>
- Li, W., Coop, M. R., Senetakis, K., & Schnaid, F. (2018). The mechanics of a silt-sized gold tailing. *Engineering Geology*, 241, 97-108. <https://doi.org/https://doi.org/10.1016/j.enggeo.2018.05.014>
- Lines, S. H., & Llano-Serna, M. (2025). INVESTIGATION INTO THE IMPACTS OF MECHANICAL IMPROVEMENT OF TAILINGS WITHIN THE CRITICAL STATE SOIL FRAMEWORK. *Australian Geomechanics, Journal and News of the Australian Geomechanics Society*, 60(4), 39-53.
- Muir Wood, D., & Maeda, K. (2008). Changing grading of soil: effect on critical states. *Acta Geotechnica*, 3(1), 3-14. <https://doi.org/10.1007/s11440-007-0041-0>
- Nayanthara, P. G. N., Gallage, C., Biyanvilage, S. S. S. D., Rajapakse, J., Rowles, T., & Tuplin, E. (2024). *Comparison of in Situ State of a Tailing Deposit with Reconstituted Laboratory Specimen States* Proceedings of the 14th International Conference on Sustainable Built Environment, Kandy, Sri Lanka.
- Nayanthara, P. N., Gallage, C., Rajapakse, J., Biyanvilage, S. S. S. D., Rowles, T., & Tuplin, E. (2023). *Characterisation of silty tailings using reconstituted samples in a critical state soil mechanics framework* 14th Australia and New Zealand Conference on Geomechanics, Cairns, Australia.
- Oberg, A.-L., & Sallfors, G. (1997). Determination of Shear Strength Parameters of Unsaturated Silts and Sands Based on the Water Retention Curve. *Geotechnical Testing Journal*, 20(1), 40-48. <https://doi.org/10.1520/GTJ11419J>
- Oldecop, L. A., & Rodari, G. J. (2021). Unsaturated mine tailings disposal. *Soils and Rocks*, 44(3). <https://doi.org/10.28927/SR.2021.067421>
- Pahalage, N. (2024). *Experimental Investigation of Critical State Behaviour and Static Liquefaction for the Design of Mine Tailings Dams* [PhD, <https://eprints.qut.edu.au/252365/>]
- Pahalage Nishadi, N., Jay, R., Chaminda, G., Sampath Sri Sameer Dareeju, B., & Timothy, R. (2024). Laboratory investigation on the transitional behaviour of tailings from a gold mine site in Australia. *Results in Engineering*, 24, 103481. <https://doi.org/https://doi.org/10.1016/j.rineng.2024.103481>
- Rampino, C., Mancuso, C., & Vinale, F. (2000). Experimental behaviour and modelling of an unsaturated compacted soil. *Canadian geotechnical journal*, 37(4), 748-763. <https://doi.org/10.1139/t00-004>
- Rassam, D. W., & Williams, D. J. (1999a). Bearing Capacity of Desiccated Tailings. *Journal of Geotechnical and Geoenvironmental Engineering*, 125(7), 600-609. [https://doi.org/doi:10.1061/\(ASCE\)1090-0241\(1999\)125:7\(600\)](https://doi.org/doi:10.1061/(ASCE)1090-0241(1999)125:7(600))
- Rassam, D. W., & Williams, D. J. (1999b). Relationship describing the shear strength of unsaturated soils. *Canadian geotechnical journal*, 36(2), 363-368. <https://doi.org/10.1139/cgj-36-2-363>
- Rodrigues, M. F., Almeida, M. d. S. S. d., Mendonça, M. B. d., & Pinheiro, J. (2025). GEOTECHNICAL BEHAVIOR OF GOLD ORE TAILINGS FROM A FILTERED STACK IN MINAS GERAIS, BRAZIL. *Australian Geomechanics, Journal and News of the Australian Geomechanics Society*, 60(4), 55-65.
- Sivakumar, V., Sivakumar, R., Murray, E. J., Mackinnon, P., & Boyd, J. (2010). Mechanical behaviour of unsaturated kaolin (with isotropic and anisotropic stress history). Part 1: wetting and compression behaviour. *Geotechnique*, 60(8), 581-594. <https://doi.org/10.1680/geot.8.P.007>
- Toll, D. G. (1990). A framework for unsaturated soil behaviour. *Geotechnique*, 40(1), 31-44. <https://doi.org/10.1680/geot.1990.40.1.31>
- Toll, D. G., & Ong, B. H. (2003). Critical-state parameters for an unsaturated residual sandy clay. *Geotechnique*, 53(1), 93-103. <https://doi.org/10.1680/geot.2003.53.1.93>
- Vanapalli, S. K., Fredlund, D. G., Pufahl, D. E., & Clifton, A. W. (1996). Model for the prediction of shear strength with respect to soil suction. *Canadian geotechnical journal*, 33(3), 379-392.
- Velten, R. Z., Consoli, N. C., Filho, H. C. S., Wagner, A. C., Schnaid, F., & Da Costa, J. P. R. (2022). Influence of grading and fabric arising from the initial compaction on the geomechanical characterisation of compacted copper tailings. *Geotechnique*, 74(5), 461-472. <https://doi.org/https://doi.org/10.1680/jgeot.22.00087>
- Wheeler, S. J., & Sivakumar, V. (1995). An elasto-plastic critical state framework for unsaturated soil. *Geotechnique*, 45(1), 35-53. <https://doi.org/10.1680/geot.1995.45.1.35>
- Wilson, G. W. (2021). The new expertise required for designing safe tailings storage facilities. *Soils and Rocks*, 44(3). <https://doi.org/10.28927/SR.2021.067521>
- Yang, J., & Luo, X. D. (2015). Exploring the relationship between critical state and particle shape for granular materials. *Journal of the Mechanics and Physics of Solids*, 84, 196-213. <https://doi.org/https://doi.org/10.1016/j.jmps.2015.08.001>